




## HIGH SPEED MACRO PUNCHING SOLUTIONS

By macroperforation we are able to give to thermoplastic films the optimal properties for the packaging of products for both food and industrial use.

### MOD. SM-CF - MOD. SM-CFL

C frame for holes on the edge of the film. It's possible to do a hole starting from diameter 3mm up to 50mm. with a throat from 100mm up to 400mm. It's possible to mount punches along the structure. Also a not completed cut hole can be done.

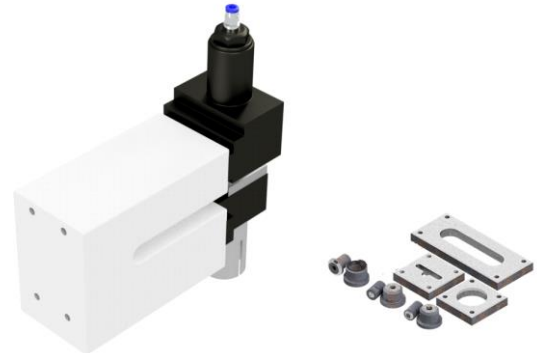

### Features

Max material width	400mm
Max speed	250 meters per minute for elastic material and 120 for rigid material
Max Frequency	4800 holes per minute with a double-sided bridge
Diameter of the holes]	from 2mm up to 50mm
Shaped holes]	yes (handle, oval, earhole, etc.)
Not completed cut holes	Yes
Installation on	bag making machine, extruder, slitter, printing machine and so on
Holes on register	Yes
Encoder to synchronize the speed	Yes
Material that could be processed	PE, PP, paper, foam non-woven, coated material and so on
Pattern	linear, Zig zag and custom
Job memory	Yes
Operator language	Yes
Easily set up punches across	Yes
User friendly software	Yes
remote assistance	Yes
Touch screen	Yes with predisposition 4.0

